



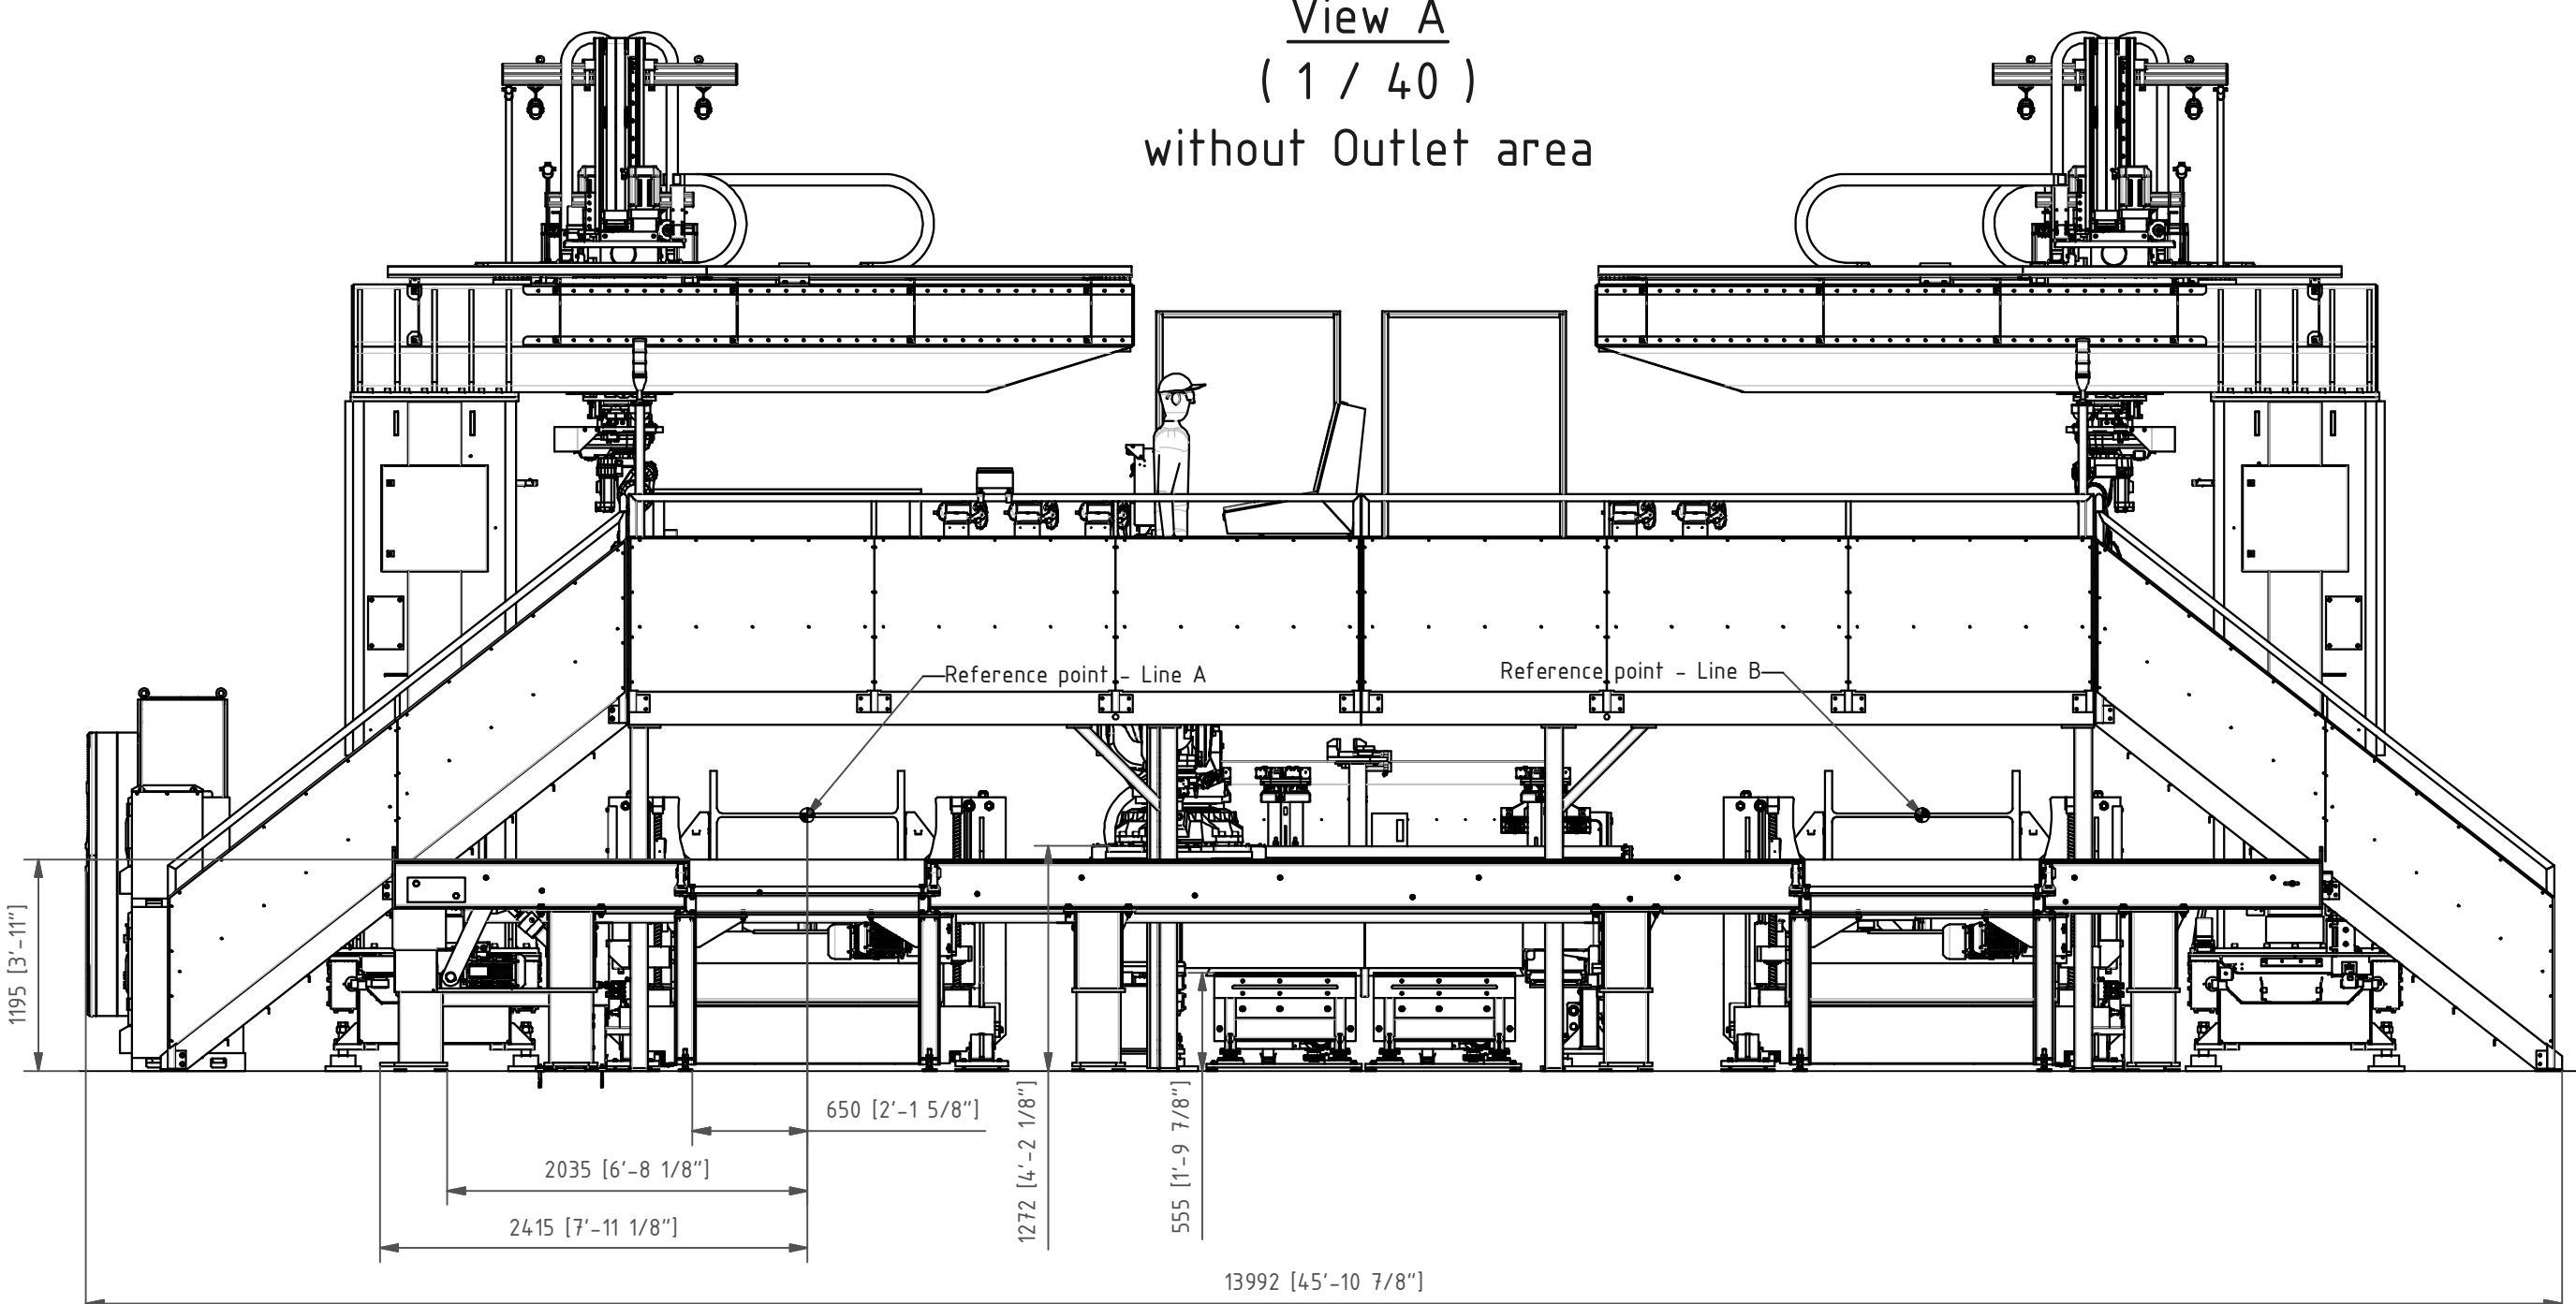

View A
(1 / 40)
without Outlet area

$$\frac{\text{max. Beam size}}{(1/10)}$$


View B
(1 / 40)

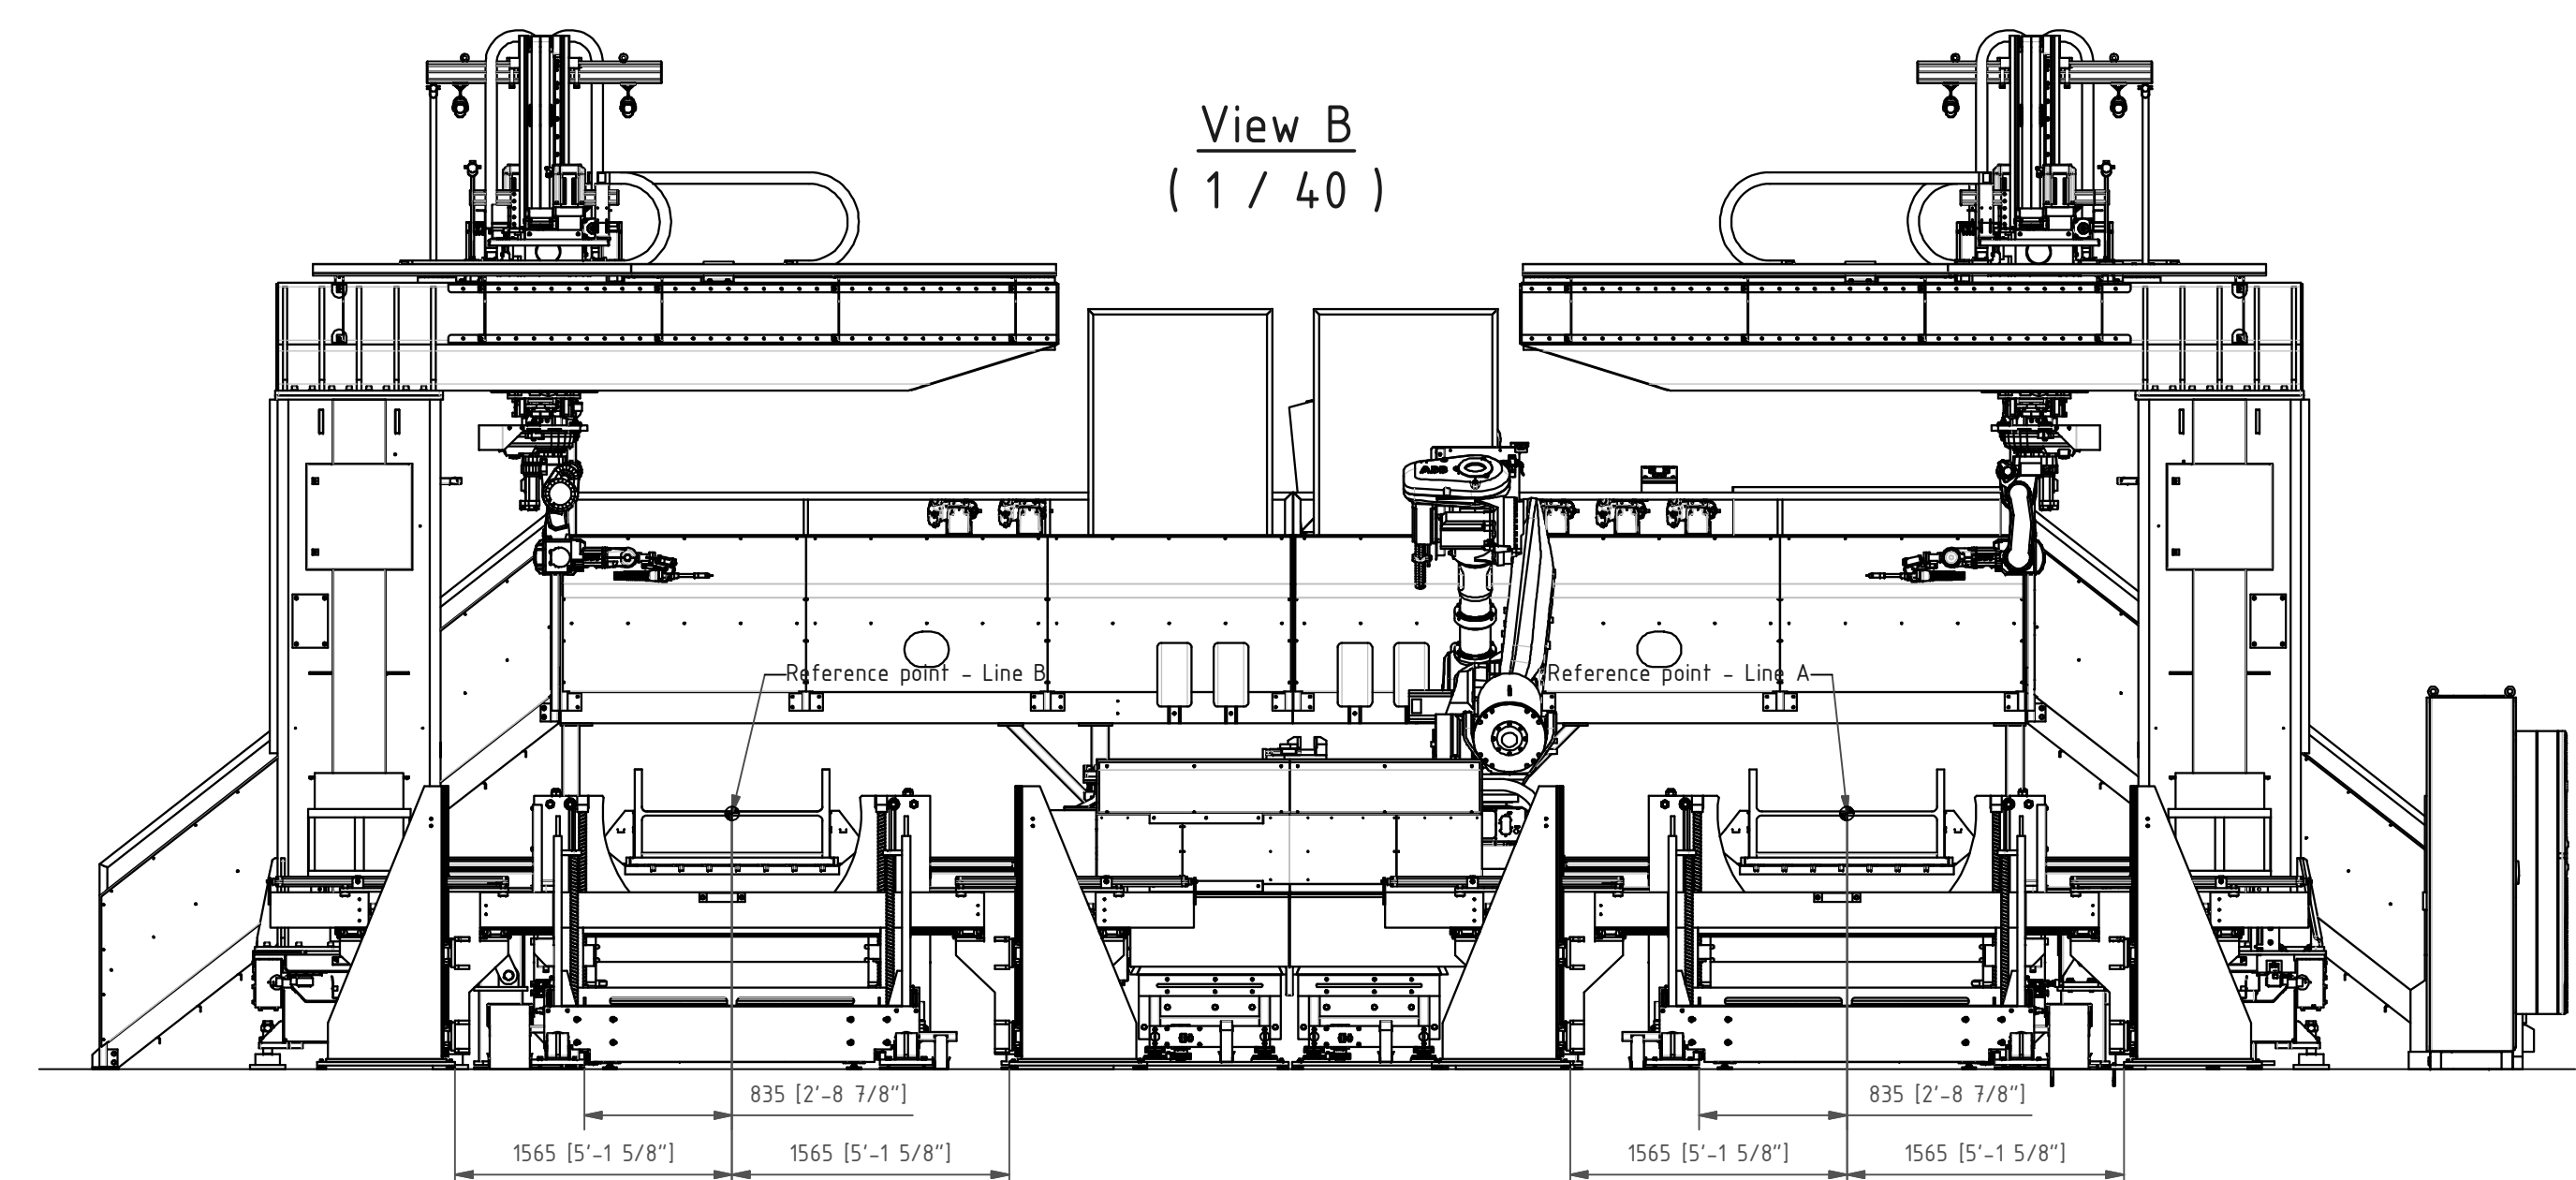

Floor conditions:
 Suitable for anchor dowel M24
 by slab thickness 250mm [9 7/8"] -> quality of cement min. C20/25
 by slab thickness 200mm [7 7/8"] -> quality of cement min. C25/30
 Floor flatness: $\pm 10\text{mm}$ [3/8"]; if possible

Floor loading capacity:
Machine area 50 kN/m^2

 ZEMAN Bauelemente Produktionsgesellschaft m.b.H.				SEER-INTERGLASS 3000 EUROPEAN 2000-2000W/3000W PRODUCTIONS - 3000W (SEE INFORMATION, INFORMATION, INFORMATION AND INFORMATION) SEE INFORMATION FOR INFORMATION INFORMATION INFORMATION INFORMATION SEE INFORMATION FOR INFORMATION INFORMATION INFORMATION INFORMATION - SEE INFORMATION SEE INFORMATION INFORMATION INFORMATION INFORMATION INFORMATION INFORMATION SEE INFORMATION INFORMATION INFORMATION INFORMATION INFORMATION INFORMATION			
Linie SBA2 conti+ 1,1x18m				Benennung Layout			
2022 KONSTR.		TAG 01.04.	NAME wallgram	POS.NR. 1	L01		FORMAT A0